




Motor protection switches	72
Remote thermostats	72
Time hour meter	72
Inrush current limiter	72
Remote thermometers	72
Ravel motors	73

Motor protection switches

Type OKN




Housing for type OKN

R+M Nr.	working range
901 510	6,3 - 10,0 A
901 516	10,0 - 16,0 A
901 522	16,0 - 22,0 A
901 527	22,0 - 27,0 A

R+M Nr.	(M)
901 540	plastic



Time hour meter



Meter with clip

R+M Nr.	(V)
915 102 4	24 V ~
915 122 0	230 V ~

Type OKE 2

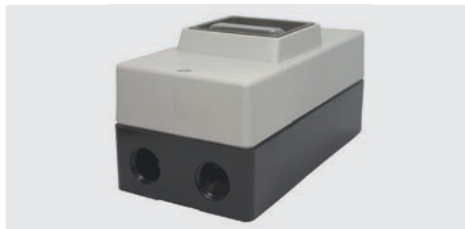

Housing for type OKE 2

R+M Nr.	working range
901 610	6,3 - 10,0 A
901 616	10,0 - 16,0 A
901 625	16,0 - 25,0 A

R+M Nr.	(M)
901 630	plastic

Inrush current limiter

gefistart





Fully electronic limiter. Rugged splashproof housing. Designed for the reduction of inrush current in case of 1-phase alternating current and for the protection of circuit safety.

R+M Nr.	(A)	(W)	(V)
901 350 0	16 A	3500 W	230 V ~

Remote thermostats


Emerson 1536



M14 x 1 M. Contact 16 A - 380 V (AC1)

R+M Nr.	working range	tube length
910 16	0 - 160 °C	1550 mm

Probe with screw




3/8" M. Contact 16 A - 380 V (AC1)

R+M Nr.	working range	tube length
910 12	30 - 150 °C	1520 mm
910 13	0 - 152 °C	920 mm

Remote thermometers


With contact probe and adjustable knob



1/2" M. Contact 5 A - 250 V (AC1). Indication of temperature 0 - 120 °C

R+M Nr.	working range	tube length
910 20	0 - 80 °C	1000 mm

Emerson 8654




3/8" M. Contact 16 A - 380 V (AC1)

R+M Nr.	working range	tube length
910 15	30 - 150 °C	1550 mm

Symbols (M) material (A) ampere (V) voltage (W) watt (∅) diameter (KW) kilowatt (TYP) type

Ravel motors



Motor with hollow shaft

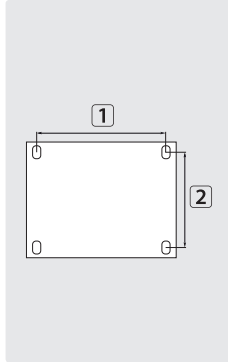

IP54. 1400 U/min

R+M Nr.	∅	hole size 1 x 2	TYP	V	A	KW
175 001 061	24	140 x 160 mm	H100	400	6,9	3,0
175 001 081	24	140 x 190 mm	H112	400	9,4	4,0
175 001 090	24	140 x 190 mm	H112	400	12,1	5,5
175 001 120	24	140 x 216 mm	H132S	400	15,4	7,5

Motor with solid shaft

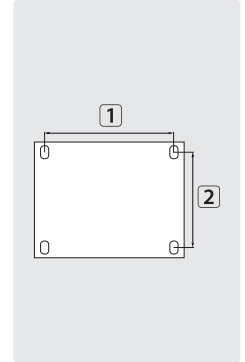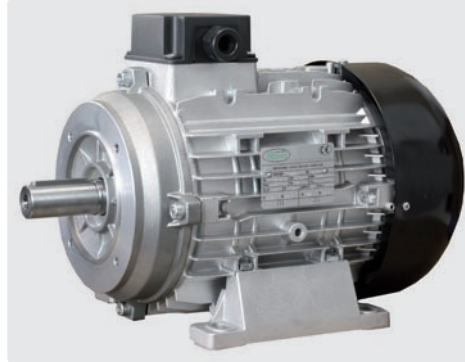

IP54. 1400 U/min

R+M Nr.	∅	hole size 1 x 2	TYP	V	A	KW
175 002 004	24	140 x 160 mm	H100	400	5,1	2,2
175 002 001	28	140 x 190 mm	H112	400	9,4	4,0
175 002 002	28	140 x 190 mm	H112	400	12,6	5,5
175 002 091	38	140 x 216 mm	H132S	400	16,8	7,5

Further versions of Ravel motors are available on request!

